


Marine Filter

3000 VA

Installation and user manual

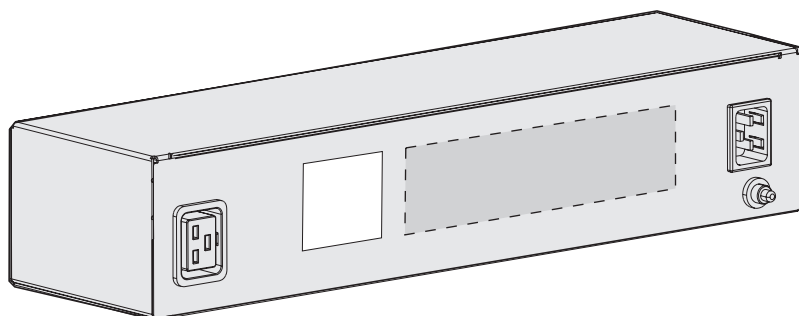

EAT•N

Powering Business Worldwide

Powering Business Worldwide


EAT•N

34008430EN/AD
www.eaton.com


Introduction

This product filters the low frequency noises produced by a UPS from 10 Hz to 150 KHz.

Packaging

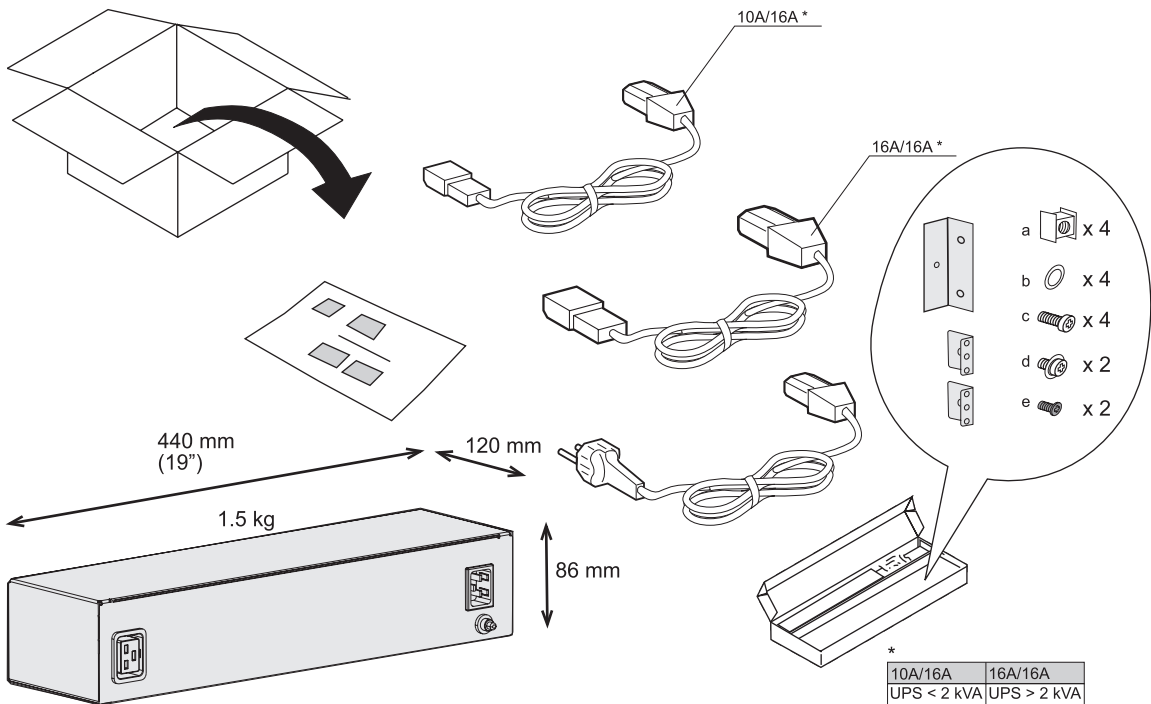


Installation

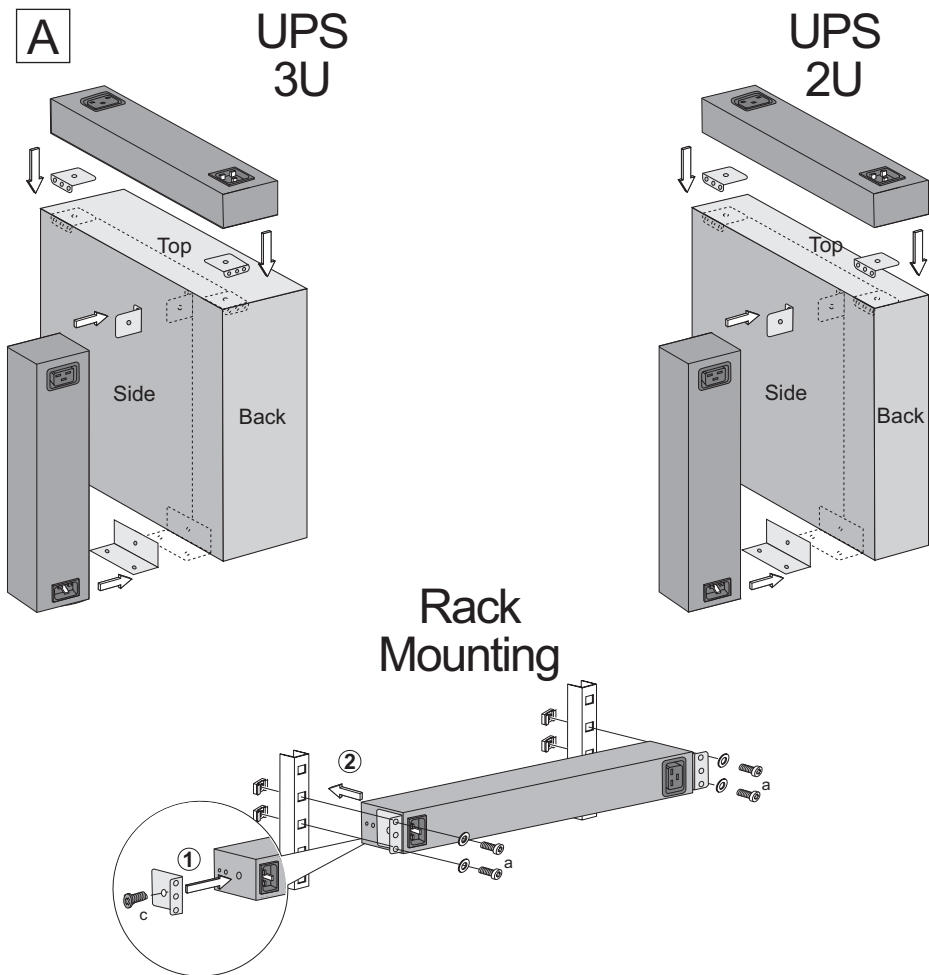

Installation

The socket-outlet shall be installed near the equipment and shall be easily accessible.

B

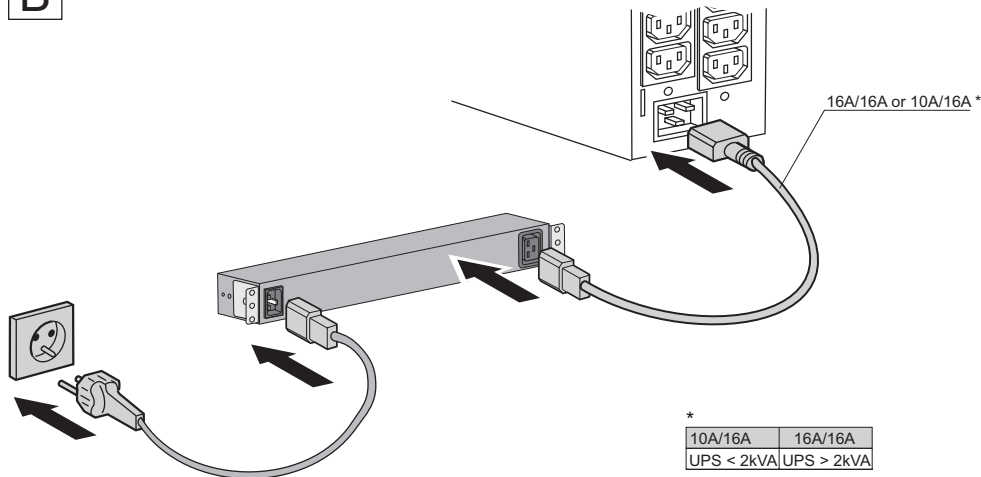

Important safety instruction:

Dangerous voltage levels are present within the filter. It should be opened exclusively by qualified service personnel.

Technical specifications

	Marine Filter 3000 VA
Power rating	3000 VA (Can be used with UPS up to 3 kVA)
Voltage Alternative current Frequency Inrush current	Single phase 220-240 V 16A max 50/60 Hz 288A crest/68 µs
Dimensions (HxLxD)	86 mm x 440 mm (19") x 120 mm
Standards Safety standards EMC standards	CEI 60950, CEI/EN 62040-1-1 & CEI 60945 CEI 62040-2 & CEI 60945
Environment ► Operating temperature range ► Relative humidity	5°C to 55°C 20% to 90% (non-condensing)

