

Product datasheet

Specifications



APC NetShelter Rack PDU Advanced, Switched Metered Outlet, 3Phase, 22.1kW 400V 32A or 17.3kW 415V 30A, 48 Outlets, IEC309

APDU10350SM

Overview

Lead time Usually in Stock

Main

Colour Black

Product or component type PDU

PDU type Switched metered outlet

Cord length 1.8 m

Complementary

Input Voltage 415 V 3 phases
400 V 3 phases

Height 1780 mm

Width 56 mm

Output Voltage 240 V

Depth 75 mm

Net weight 9.6 kg

Mounting location Side

Mounting preference No preference

Input Plug Type IEC 60309 30 A 3P + N + PE

Mounting mode Rack-mounted

Rack units 0U

Mounting position Vertical

Communication port protocol 1000BASE-T
10/100BASE-T

[In] rated current 24 A

permissible voltage 200...240 V
346...415 V

Input current limits 30 A

Load capacity 17300 VA

Network frequency 50/60 Hz

Outlet type and quantity 24 C13/C15/C19/C21
24C13/C15

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Environment

Product certifications	UKCA TAA compliance BAA compliance
Standards	UL 62368-1 CSA C22.2 No 62368-1 FCC part 15 Subpart B CE EN 62368-1
IP degree of protection	IP44
Ambient air temperature for operation	-5...60 °C
Relative humidity	5...95 %
Operating altitude	0...10000 ft
Ambient air temperature for storage	-25...65 °C
Storage Relative Humidity	5...95 %
Storage altitude	0...15240 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	198 cm
Package 1 Width	13.2 cm
Package 1 Length	26.2 cm
Package 1 Weight	12.6 kg

Contractual warranty

Warranty (in months)	36
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint	2021
----------------------------------	------

Use Better

Materials and Substances

Packaging made with recycled cardboard	No
--	----

Packaging without single use plastic	No
--------------------------------------	----

EU RoHS Directive	Compliant
-----------------------------------	-----------

REACH Regulation	REACH Declaration
------------------	-----------------------------------

Energy efficiency

Energy Efficiency Optimized	Energy efficient product
-----------------------------	--------------------------

Use Again

Repack and remanufacture

End of life manual availability	End of Life Information
---------------------------------	---


Take-back	No
-----------	----

WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
------------	---

Image of product / Alternate images

Alternative

Multiple color options available

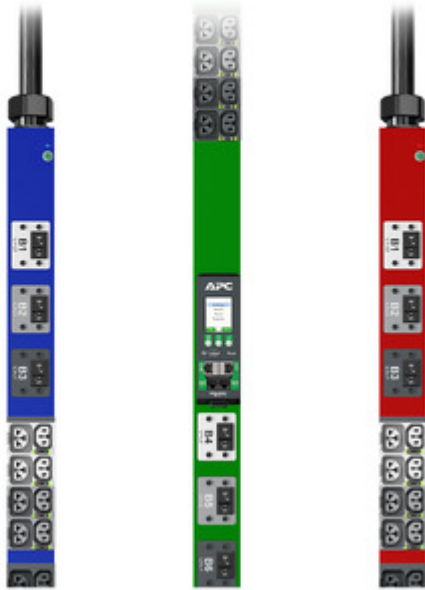

4-in-1 outlet for increased flexibility



Acts as any of these outlet types:



C13



C15



C19



C21













