



robustOS

R1510 Lite

Industrial Cellular VPN Router

1 x Ethernet + 1 x SIM



INTRODUCTION

The Robustel's R1510 Lite router is a 2G/3G/4G router equipped with advanced software functionalities at a highly competitive price point. The R1510 Lite includes several unique software innovations, including but not limited to:

RobustVPN: An innovative implementation of OpenVPN tunneling that provides a fixed IP address on any SIM card.

RCMS: Robustel's cloud management platform, essential for managing a fleet of routers, with a basic version available for free.

At the core of all Robustel routers is the **RobustOS** operating system. With five years of development and innovative features, RobustOS offers customers a professional product with an intuitive graphical user interface and the connection stability required for critical IoT applications. The router's compact design makes it ideal for space-constrained applications such as bus signs, ticketing machines, vending machines, covert surveillance, and digital signage.

The **Robustel Cloud Manager Service (RCMS)** is a unified cloud-based platform designed for real-time monitoring and centralized management of industrial IoT devices. Fully compatible with Robustel routers and gateways, RCMS delivers an interactive geospatial dashboard that enables users to visualize device locations and track critical metrics such as data usage, signal strength, and network status. To ensure seamless operations, the platform facilitates over-the-air (OTA) updates for firmware, configurations, and applications, minimizing downtime while optimizing system performance. Experience robust, cloud-native device management by registering at: <https://rcms-cloud.robustel.net>




robustel
RCMS CLOUD

KEY FEATURES

- Highly stable 2G/3G/4G cellular connections
- Ethernet and 4G network connection options with automatic failover
- Free cloud management platform – RCMS
- Fully programmable Linux environment with comprehensive SDK documentation
- RobustVPN provides a fixed IP address on any SIM card
- Full SMS control for diagnostics and recovery from data network issues
- Extremely compact design for space-constrained applications
- Wall-mount and DIN-rail mounting options available

APPLICATION EXAMPLE

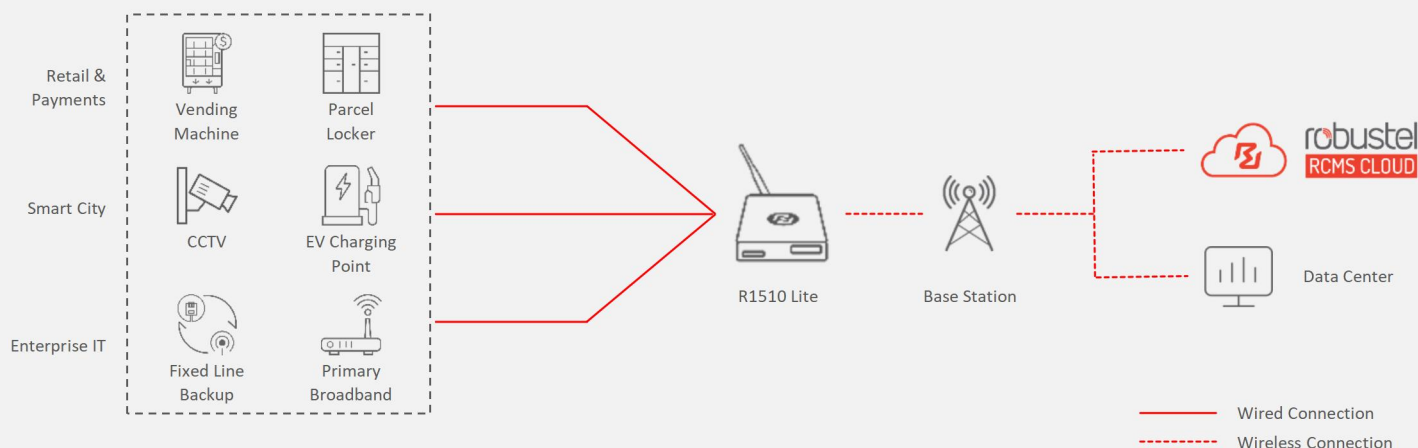

SPECIFICATIONS

Hardware System	
CPU	MIPS, 650 MHz
RAM	128 MB
Flash	16 MB
Cellular Interface	
Number of antennas	1 (MAIN)
Connector	SMA-K
SIM	1 x Mini SIM (2FF)
Ethernet Port	
Number of ports	1 x 10/100 Mbps, 1 x LAN
Magnet isolation protection	1.5 KV
Others	
Reset button	1 x RST
LED indicators	1 x RUN, 1 x MDM, 1 x USR, 1 x RSSI 1 x WLAN (reserved)
Watchdog	Built-in
Power Supply and Consumption	
Connector	2-pin 3.5 mm female socket
Input voltage	12/24 V DC, 9 ~ 36 V DC Reverse polarity protection, surge protection
Power consumption	Idle: 1.5 W@12 V Max: 6.0 W@12 V
Recommended power supply	12 V DC/1.0 A power adapter
Physical Characteristics	
Ingress protection	IP30
UL 94	V-0, 5 VB
Housing & Weight	Plastic, 150 g
Dimensions	31.5 x 91.5 x 91.5 mm
Installations	Desktop, wall mounting and 35 mm DIN rail mounting
Operating temperature	-20 ~ +70 °C
Storage temperature	-40 ~ +85 °C
Relative humidity	5 ~ 95% RH (non-condensing)

Software (Basic features of RobustOS)	
Network protocols	PPPoE, TCP, UDP, DHCP, NAT, DNS, NTP, SMTP, Telnet, VLAN, SSH2, DDNS, etc.
VPN tunnels	IPsec, OpenVPN, GRE, Wireguard
Firewalls	DMZ, anti-DoS, Filtering (IP/Domain name/MAC address), Port Mapping, Access Control
Remote management	Web, CLI, SMS
Routing	Static routing, Dynamic routing (BGP, OSPF v2, RIP v1/v2)
SDK	
Supported programming languages	C, C++
Flash available for SDK	4 MB
RAM available for SDK	64 MB

App Center (Available Apps for RobustOS)	
Apps*	L2TP, PPTP, DMVPN, VRRP, QoS, SNMP, Language, RCMS, etc.
*Request on demand. For more Apps please visit www.robustel.com .	

Cloud Platform	
Robustel Cloud Manager Service (RCMS)	RobustLink, RobustVPN, Operation Console

Regulatory and Type Approvals	
Environmental	RoHS2.0
EMI	EN 55032 Conducted Emission Class B EN 55032 Radiated Emission Class B
EMS	EN 61000-4-2 (ESD) Contact Level 2, Air Level 3 EN 61000-4-3 (RS) Level 2 EN 61000-4-4 (EFT) Level 2 EN 61000-4-5 (Surge) Level 3 EN 61000-4-6 (CS) Level 2

ORDERING INFORMATION

Model	Order Code	Frequency Bands*	Country /Region	Certification	Package Contains
R1510L-4L-A02EU	A005900705	4G: LTE FDD: B1/3/7/8/20/28A 3G: WCDMA: B1/8 2G: GSM: B3/8	EMEA+SEA	CE UKCA	1 x R1510 Lite Router (B Code: B059701)
	A005900706				1 x R1510 Lite Router(B Code: B059701) 1 x DIN Rail Mounting Kit 1 x Cellular Antenna 1 x Power Adapter
R1510L-4L-A03AU	A005900707	4G: LTE FDD: B1/2/3/4/5/7/8/28 LTE TDD: B40 3G: WCDMA: B1/2/5/8 2G: GSM: B2/3/5/8	ANZ+LATAM	RCM FCC	1 x R1510 Lite Router(B Code: B059703)
	A005900708				1 x R1510 Lite Router(B Code: B059703) 1 x DIN Rail Mounting Kit 1 x Cellular Antenna 1 x Power Adapter

*For more information about frequency bands in different countries, please contact your Robustel sales representative.