


OVERVIEW

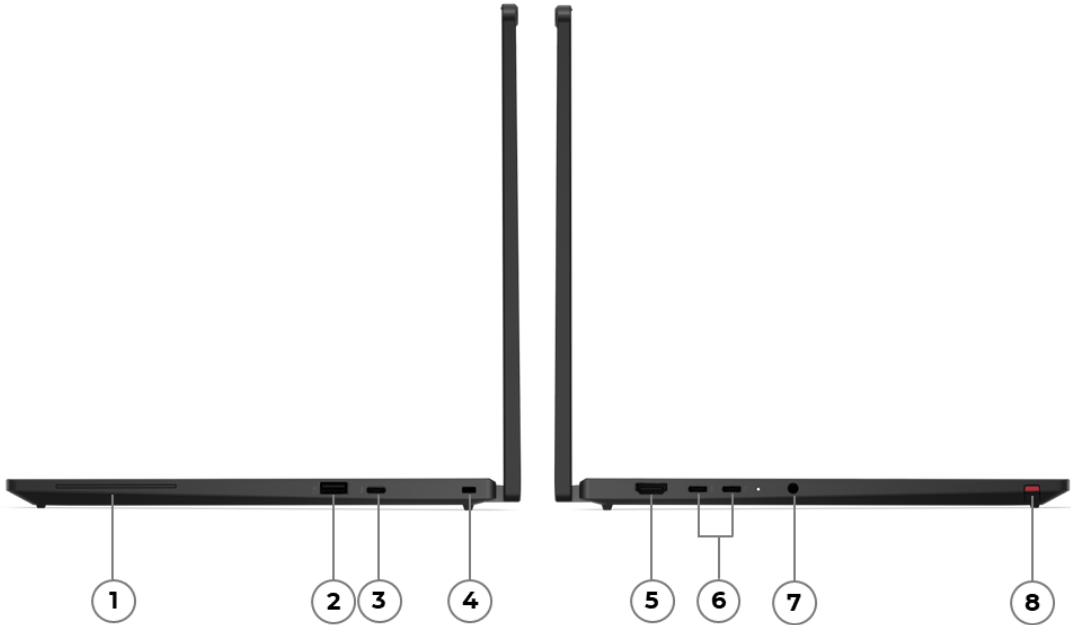

|                                  |                                              |
|----------------------------------|----------------------------------------------|
| 1. Smart card reader *           | 5. HDMI                                      |
| 2. USB-A (USB 5Gbps), Always On  | 6. 2x Thunderbolt 4                          |
| 3. Thunderbolt 4                 | 7. Headphone / microphone combo jack (3.5mm) |
| 4. Kensington Nano Security Slot | 8. Pen slot                                  |

- Notes:
- Items with \* are only available on selected models
  - Optional nano-SIM card slot on the right side (not shown on the sample product above)

PERFORMANCE

Processor

Processor Family

Intel® Core™ Ultra 5 / 7 Processor (Series 3)

Processor\*\*

| Processor Name    | Cores                                  | Threads | Base Frequency                                   | Max Frequency                                    | Cache                   | Processor Graphics             | NPU           |
|-------------------|----------------------------------------|---------|--------------------------------------------------|--------------------------------------------------|-------------------------|--------------------------------|---------------|
| Core Ultra 5 325  | 8 (4 P-core + 4 LP E-core)             | 8       | P-core 2.1GHz / LP E-core 1.6GHz                 | P-core 4.5GHz / LP E-core 3.4GHz                 | 12MB Intel® Smart Cache | Intel® Graphics, up to 40 TOPS | Up to 47 TOPS |
| Core Ultra 5 335  | 8 (4 P-core + 4 LP E-core)             | 8       | P-core 2.2GHz / LP E-core 1.6GHz                 | P-core 4.6GHz / LP E-core 3.4GHz                 | 12MB Intel® Smart Cache | Intel® Graphics, up to 40 TOPS | Up to 47 TOPS |
| Core Ultra 7 355  | 8 (4 P-core + 4 LP E-core)             | 8       | P-core 2.3GHz / LP E-core 1.7GHz                 | P-core 4.7GHz / LP E-core 3.5GHz                 | 12MB Intel® Smart Cache | Intel® Graphics, up to 40 TOPS | Up to 49 TOPS |
| Core Ultra 7 356H | 16 (4 P-core + 8 E-core + 4 LP E-core) | 16      | P-core 1.9GHz / E-core 1.5GHz / LP E-core 1.5GHz | P-core 4.7GHz / E-core 3.5GHz / LP E-core 3.3GHz | 18MB Intel® Smart Cache | Intel® Graphics, up to 40 TOPS | Up to 50 TOPS |
| Core Ultra 7 365  | 8 (4 P-core + 4 LP E-core)             | 8       | P-core 2.4GHz / LP E-core 1.8GHz                 | P-core 4.8GHz / LP E-core 3.6GHz                 | 12MB Intel® Smart Cache | Intel® Graphics, up to 40 TOPS | Up to 49 TOPS |
| Core Ultra 7 366H | 16 (4 P-core + 8 E-core + 4 LP E-core) | 16      | P-core 2.0GHz / E-core 1.6GHz / LP E-core 1.6GHz | P-core 4.8GHz / E-core 3.6GHz / LP E-core 3.4GHz | 18MB Intel® Smart Cache | Intel® Graphics, up to 40 TOPS | Up to 50 TOPS |

AI (Artificial Intelligence)

AI PC Category

Copilot+ PC<sup>[1]</sup>

NPU

Up to 50 TOPS

Notes:

[1] Copilot+ PCs have at least 16GB RAM, 256GB storage, and a NPU that runs 40+ TOPs to run the latest AI tools build-in latest Windows® 11 to accelerate productivity and creativity.

Operating System

Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Ubuntu Linux<sup>[1]</sup>
- Linux<sup>[2]</sup>
- No preload operating system

Notes:

[1], [2] Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics

| Graphics        | Type       | Memory | Key Features         |
|-----------------|------------|--------|----------------------|
| Intel® Graphics | Integrated | Shared | DirectX® 12 Ultimate |

Monitor Support

Monitor Support<sup>[1]</sup>

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and Thunderbolt™)

- HDMI® supports up to 4K@60Hz
- Thunderbolt™ supports up to 8K@60Hz<sup>[2]</sup>

Notes:

[1] Refresh rates >60hz also supported, however max resolution will be limited.

[2] 8K resolution support needs 2 display pipes. That is, simultaneous display number will “-1” when 8K resolution displayed.

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory

- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable
- 64GB soldered memory, not upgradable

Memory Slots

Memory soldered to systemboard, no slots, dual-channel

Memory Type\*\*

- LPDDR5X-7467<sup>[1]</sup>
- LPDDR5X-8533

Notes:

[1] Installed memory is actually LPDDR5X-8533 but runs as LPDDR5X-7467 due to platform limitation.

Storage

Max Storage Support<sup>[1]</sup>

One drive, up to 2TB M.2 2280 SSD

Storage Slot<sup>[2]</sup>

One M.2 2280 PCIe® 5.0 x4 slot

Storage Type\*\*

| Disk Type    | Interface                             | Offering            | Security |
|--------------|---------------------------------------|---------------------|----------|
| M.2 2280 SSD | PCIe® NVMe®, PCIe® 4.0 x4             | 256GB / 512GB / 1TB | Opal 2.0 |
| M.2 2280 SSD | PCIe® NVMe®, PCIe® 5.0 x4 Performance | 512GB / 1TB / 2TB   | Opal 2.0 |

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

[2] The actual data transfer rate of the following PCIe® interface also depends on the capabilities of the connected PCIe® device. The listed values represent theoretical maximums.

PCIe® 3.0 (x2 / x4): 2 GB/s (16 Gbps) / 4 GB/s (32 Gbps);

PCIe® 4.0 (x2 / x4): 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps);

PCIe® 5.0 (x2 / x4): 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps).

Removable Storage

Card Reader

No card reader

Multi-Media

Audio Chip

SoundWire®, Realtek® ALC3346 codec

Speakers

Stereo speakers, 2W x2, Dolby Atmos®

Microphone

Dual-microphone array, 360° far-field, Dolby Voice®

Camera

5.0MP + IR discrete, with privacy shutter, fixed focus, vHDR, Computer Vision on Image Signal Processor (ISP), temporal noise reduction<sup>[1]</sup>

Notes:

[1] Computer Vision on ISP is only available on the models with preloaded OS.

Battery

Battery

58Wh Rechargeable Li-ion Battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter<sup>[1]</sup>

Battery Life<sup>[2]</sup>

Configuration 1 (max battery life)  
MobileMark® 30: up to 18.9 hr with 1037 performance score @250nits  
JEITA-BAT 3.0 (Video/Idle): up to 19.4 hr / 33.8 hr @200nits  
Local video playback: up to 34.0 hr @150nits

Alternate configuration 2  
MobileMark® 25: up to 14.6 hr with 1105 performance score @250nits  
JEITA-BAT 3.0 (Video/Idle): up to 16.9 hr / 23.9 hr @200nits  
Local video playback: up to 27.5 hr @150nits

Notes:

[1] Rapid charge is only guaranteed when the computer is turned off or in standby mode or in hibernation mode. When the computer is powered on, the Charge Time will vary depending on system power consumption and AC adapter power.  
[2] Configuration 1 (max battery life): WUXGA low power (touch), Intel® Core™ Ultra 5 325, 16GB LPDDR5X, Win 11, 58Wh battery, best power efficiency power mode  
Alternate configuration 2: WUXGA (touch), Intel® Core™ Ultra 5 335, 16GB LPDDR5X, Win 11, 58Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark® 25](#), JEITA 3.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.  
Actual battery life will vary depending on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.  
The maximum capacity of the battery will decrease with time, ambient temperature and use.  
Refer to [Microsoft® link](#) for more information about the Windows® Performance power slider.

Power Adapter

Power Adapter<sup>\*\*[1]</sup>

- 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® nano GaN (2-pin, wall-mount) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® nano GaN (3-pin, wall-mount) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim GaN (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim GaN (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

Notes:

[1] AC adapter offerings depend on the country.

DESIGN

Display

Display<sup>\*\*[1]</sup>

| Size | Resolution | Touch | Type | Brightness | Surface | Aspect Ratio | Contrast Ratio | Color Gamut | Refresh Rate | Viewing Angle | Key Features |
|------|------------|-------|------|------------|---------|--------------|----------------|-------------|--------------|---------------|--------------|
|------|------------|-------|------|------------|---------|--------------|----------------|-------------|--------------|---------------|--------------|

|     |                   |             |                    |         |                              |       |        |           |      | (L/R/U/D)             |                                                 |
|-----|-------------------|-------------|--------------------|---------|------------------------------|-------|--------|-----------|------|-----------------------|-------------------------------------------------|
| 14" | WUXGA (1920x1200) | Multi-touch | IPS <sup>[2]</sup> | 400nits | Anti-glare                   | 16:10 | 1000:1 | 45% NTSC  | 60Hz | 85° / 85° / 85° / 85° | 3M™ DBEF5, Eyesafe® Certified 2.0               |
| 14" | WUXGA (1920x1200) | Multi-touch | IPS <sup>[3]</sup> | 400nits | Anti-reflection, Anti-smudge | 16:10 | 1000:1 | 45% NTSC  | 60Hz | 85° / 85° / 85° / 85° | 3M™ DBEF5, Eyesafe® Certified 2.0               |
| 14" | WUXGA (1920x1200) | Multi-touch | IPS <sup>[4]</sup> | 500nits | Anti-reflection, anti-smudge | 16:10 | 1500:1 | 100% sRGB | 60Hz | 85° / 85° / 85° / 85° | Low power, Eyesafe® Certified 2.0               |
| 14" | WUXGA (1920x1200) | Multi-touch | IPS <sup>[5]</sup> | 500nits | Anti-glare                   | 16:10 | 1500:1 | 100% sRGB | 60Hz | 89° / 89° / 89° / 89° | ThinkPad® Privacy Guard, Eyesafe® Certified 2.0 |

Touchscreen

OGS (One Glass Solution) multi-touch, supports 10-point touch

Screen-to-Body Ratio

85%

Notes:

- [1] 3M™ DBEF5 (Dual Brightness Enhancement Film) improves the experience with higher brightness and lower energy.  
[2], [3], [4], [5] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Multi-mode

Multi-mode

Laptop, tent, stand, and tablet modes supported by 360° hinge

Input Device

Pen\*\*

- Lenovo® Garaged Pen, with built-in rechargeable battery, on-board garaged and rechargeable
- Lenovo® Yoga® Pen, supports magnetic attachment, tilt detection and Type-C charging
- No pen bundled (purchase separately)

Keyboard

6-row, spill-resistant, multimedia Fn keys, key travel 1.5mm / 1.35mm (Fn row & G/H/B), Copilot key

Keyboard Backlight

LED backlight

UltraNav™

TrackPoint® pointing device, double-tap to open the TrackPoint® Quick Menu  
Glass-like Mylar® surface multi-touch 3-button Trackpad, 66.6 x 115 mm (2.62 x 4.53 inches)

Mechanical

Dimensions (WxDxH)<sup>[1]</sup>

313 x 224 x 12.06/17.84 (front/rear), 20.43 (maximum) mm;  
12.32 x 8.82 x 0.47/0.70 (front/rear), 0.80 (maximum) inches

Weight<sup>[2]</sup>

Starting at 1.35 kg (2.98 lbs)

Case Color

Black

Case Material

Magnesium (top), aluminium (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

### Network

#### WLAN + Bluetooth®\*\*[1]

- Intel® Wi-Fi® 7 BE211, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4 (Bluetooth® 6.0 hardware ready)
- Intel® Wi-Fi® 7 BE211, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4 (Bluetooth® 6.0 hardware ready), Intel® vPro® technology support<sup>[2]</sup>

#### WWAN\*\*

- Wireless WAN upgradable to 4G (with antenna ready)
- Wireless WAN upgradable to 5G (with antenna ready)
- Rolling Wireless RW220-GL, 4G LTE CAT1, M.2 card, with embedded eSIM functionality
- Snapdragon® X12 LTE Modem, 4G LTE CAT6, M.2 card, with embedded eSIM functionality
- Snapdragon® X61 5G Modem-RF System, Sub-6 GHz, M.2 card, with embedded eSIM functionality
- No support

#### SIM Card\*\*[3]

- KDDI eSIM Program 3-year (Japan)
- KDDI eSIM Program 3-year with international roaming (Japan)
- KDDI eSIM Program 4-year (Japan)
- KDDI eSIM Program 4-year with international roaming (Japan)
- KDDI eSIM Program 5-year (Japan)
- KDDI eSIM Program 5-year with international roaming (Japan)
- No physical SIM card inbox

#### Ethernet

No onboard Ethernet<sup>[4]</sup>

#### NFC

- Near Field Communication
- No support

#### Notes:

[1] Wi-Fi® operation (including Wi-Fi® 6, Wi-Fi® 6E, Wi-Fi® 7, etc.) is subject to the regulatory requirements of each country. Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

[2] Intel® vPro® platform requires the hardware and software necessary to deliver the manageability use cases, security features, system performance, and stability that define the platform. For detailed vPro® support information, please refer to the System Management section.

[3] KDDI eSIM Program has no physical SIM card inbox and is for special bid only.

[4] Ethernet support via optional Lenovo® USB-C® to Ethernet Adapter.

### Ports<sup>[1]</sup>

#### Standard Ports

- 1x USB-A (USB 5Gbps), Always On
- 3x Thunderbolt™ 4, with USB PD 15-65W and DisplayPort™ 2.1
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)

#### Optional Ports\*\*\*

- 1x Nano-SIM card slot (WWAN support models)
- 1x Smart card reader

#### Notes:

[1] The transfer speed of the ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

## Docking

### Docking

Various docking solutions supported via Thunderbolt™ / USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkPad® T14s 2-in-1 Gen 2](#)

## SECURITY & PRIVACY

### Security

#### ThinkShield

ThinkShield is a comprehensive security solution that encompasses hardware, software, and supply chain components. For more details, visit [here](#)

#### Security Chip

Discrete TPM 2.0, TCG certified

#### Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

#### Smart Card Reader

- Smart card reader, supports ISO 7816 and EMV
- No smart card reader

#### Fingerprint Reader

Touch style fingerprint reader integrated in power button, match-on-chip

#### BIOS Security

- Certificate-based BIOS authentication
- FIDO (Fast Identity Online) authentication
- NVMe® password
- Power-on password
- Supervisor password
- System management password
- Self-healing BIOS
- More BIOS security features, please visit [BIOS Simulator](#)

#### Other Security

- (Optional) Computer Vision-based Human Presence Detection on Image Signal Processor (ISP)
- Camera privacy shutter
- IR camera for Windows® Hello (facial recognition)
- Privacy Guard with Privacy Alert (models with ThinkPad® Privacy Guard display)

## MANAGEABILITY

### System Management

#### System Management<sup>[1]</sup>

- Intel® vPro® Enterprise<sup>[2]</sup>
- Non-vPro®

Notes:

[1] Intel® vPro® platform require an eligible Intel® processor, a supported operating system, Intel® LAN and/or WLAN silicon, firmware enhancements, and other hardware and software necessary to deliver the manageability use cases, security features, system performance, and stability that define the platform. See [Intel® vPro® Platform](#) for details.

[2] Intel® vPro® offers a superset of DASH's defined capabilities.

## SERVICE

### Warranty

#### Base Warranty\*\*

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)

- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

## ACCESSORIES

### Bundled Accessories

#### Bundled Accessories\*\*\*<sup>[1]</sup>

- Lenovo® HDMI® to VGA Monitor Adapter
- Lenovo® USB-C® to Ethernet Adapter (1Gbps)
- None

Notes:

<sup>[1]</sup> For more compatible accessory solutions, please visit [Accessories for ThinkPad® T14s 2-in-1 Gen 2](#).

## OPERATING REQUIREMENTS

### Operating Environment

#### Temperature<sup>[1]</sup>

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F ) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

#### Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

<sup>[1]</sup> When you charge the battery, its temperature must be no lower than 10°C (50°F).

## ENVIRONMENTAL

### Sustainability

#### Material<sup>[1]</sup>

Top cover: 90% Recycled Magnesium  
Keyboard frame: 90% recycled magnesium  
Bottom cover: 90% Recycled Magnesium or 50% Recycled Aluminum  
Keyboard (keycaps): 85% PCC Plastic  
Speaker enclosure: 90% PCC  
Speaker Magnet: 30% Recycled Rare Earth Materials  
Hall Sensor Magnet: 30% Recycled Rare Earth Materials  
Battery: 100% recycled cobalt  
Battery frame: 90% PCC  
Adapter: 90% PCC  
Cable/antenna holders: 30% PCC  
Packaging: Plastic Free, FSC certified Recycled paperboard / cardboard

Notes:

<sup>[1]</sup> PCC: Post Consumer Content, recycled materials from customers.

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications<sup>[2]</sup>



- ENERGY STAR® 9.0
- EPEAT™ Gold Registered<sup>[3]</sup>
- ErP Lot 6/26
- RoHS compliant
- TCO Certified, generation 10

---

**Notes:**

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ registration and ENERGY STAR® certification are optional and only available on the models with preloaded OS. Please visit [epeat.net](https://epeat.net) and [energystar.gov](https://energystar.gov) for more information.

[3] EPEAT™ is registered where applicable, please visit [epeat.net](https://epeat.net) for registration status by country.

## Other Certifications

### Mil-Spec Test

MIL-STD-810H military test passed

### Other Certifications

Eyesafe® Certified 2.0

- Feature with \*\* means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Feature with \*\*\* means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS", WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



Copilot+PC



Copilot+PC



Copilot+PC



Copilot+PC



Copilot+PC



Copilot+PC